MASON INDUSTRIES, Inc.
Manufacturers of Vibration Control Products
350 Rabro Drive, Hauppauge, NY 11788, 631/348-0282, FAX 631/348-0279, Info@Mason-Ind.com
2101 W. Crescent Ave., Suite D, Anaheim, CA 92801, 714/535-2727, FAX 714/535-5738, Info@MasonAnaheim.com
www.Mason-Ind.com

JOB NAME _____
CUSTOMER _____
CUSTOMER P.O. _____
MASON M.I. _____
DWG. NO. _____

ADA(H)

All Directional Anchors for Pipe Clamps or Guides

ADA

Change designation to ADAH when base plate with bolt holes is required.

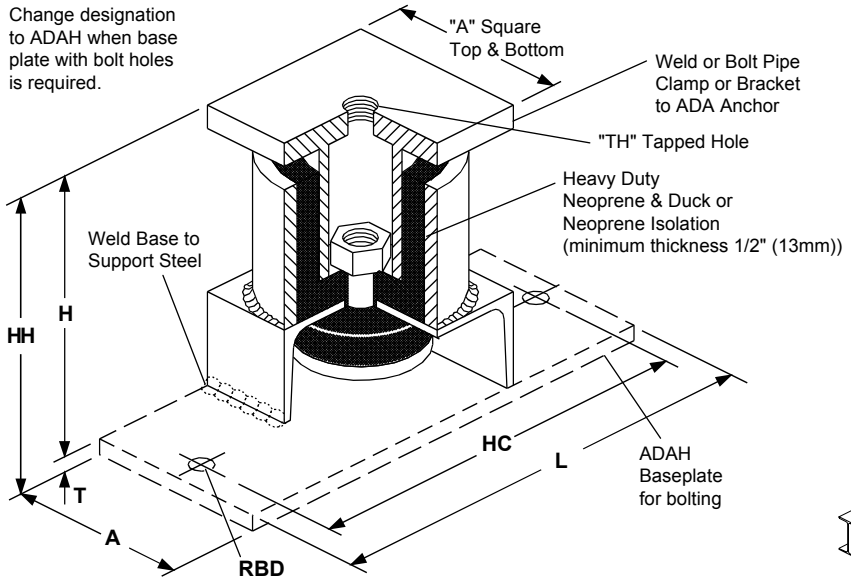

TYPE ADA and ADAH RATINGS

Size	Anchoring Capacity per Pair (lbs)	(kg)	Rated Defl. (in)	(mm)
75	1,000	454	0.1	3
200	6,000	2,722	0.1	3
350	24,000	10,886	0.1	3
600	60,000	27,216	0.1	3
800	100,000	45,359	0.1	3

Each pair of ADA(H) all directional anchors provides high frequency noise and vibration isolation for those locations where movement must be controlled.

When the anchors are attached to piping as shown in the illustrations below, all expansion will be directed from this point.

Anchors are always used in pairs.

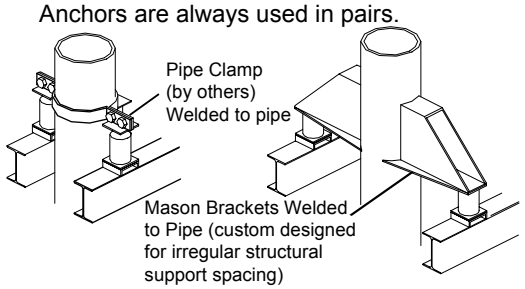

TYPE ADA and ADAH DIMENSIONS

RBD-Required Bolt Dia. for Maximum Loading

Type	Size	A	H	L	T	HC	HH	RBD	TH
ADA-	75	3 76	4 1/2 114	6 152	1/4 6	5 127	4 3/4 121	3/8 10	1/2-13 UNC
	200	4 102	7 178	11 279	3/8 10	8 1/2 216	7 3/8 187	5/8 16	5/8-11 UNC
	350	* *	7 1/4 184	12 305	1/2 13	9 1/2 241	7 3/4 197	3/4 19	7/8-9 UNC
ADA(H)-	600	9 229	11 279	14 1/2 368	3/4 19	12 305	11 3/4 298	1 1/4 31	None
	800	11 279	13 1/2 343	17 1/2 445	1 25	14 1/2 368	14 1/2 368	1 1/2 38	None

* Size 350 - Top is 5" × 5" 125 x 125, Base is 6" × 6" 150 x 150

CERTIFICATION DATA

TYPE	QTY.	TAG