




MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com
 www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M. _____
 DWG No. _____

HS
 2" 50mm Deflection
 B, B2, C2, 2-C2
 & 4-C2
 Series Hangers

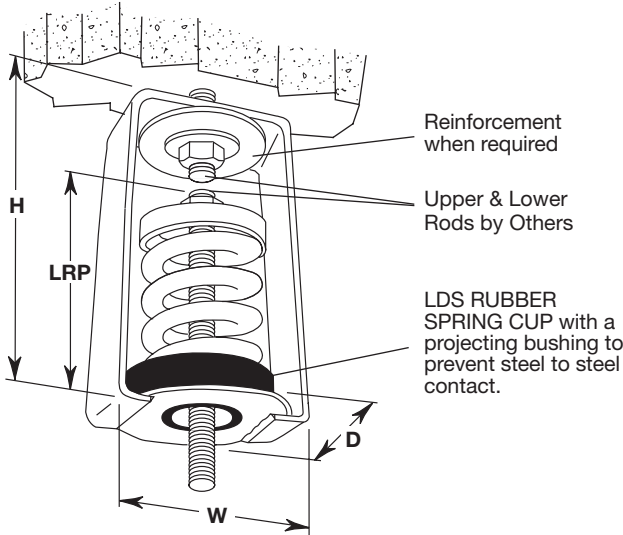

LDS stands for **Low Dynamic Stiffness Bridge Bearing**.
 Natural Rubber to minimize noise and vibration transmission.

LRP - Lower Rod Penetration
 MRD - Maximum Rod Diameter

TYPE HS RATINGS

Type and Size	Rated Capacity (lbs) (kg)		Rated Deflection [†] (in) (mm)		Spring Constant ^{††} (lbs/in) (kg/mm)		Spring Color
HS-B-20	20	9	2.40	61	8	0.15	Tan
HS-B-26	26	12	2.18	55	12	0.22	White/Blue
HS-B-35	35	16	2.20	56	16	0.29	Purple
HS-B-50	50	23	2.20	56	24	0.41	White/Red
HS-B-65	65	30	2.10	53	31	0.57	Brown
HS-B-85	85	39	2.10	53	40	0.74	White/Blk
HS-B-115	115	52	2.00	51	57	1.0	Silver
HS-B-150	150	68	2.00	51	75	1.3	Orange
HS-B2-210	210	96	2.12	54	99	1.8	Silver
HS-B2-290	290	132	2.00	51	144	2.6	Blue
HS-B2-450 [‡]	450	205	2.00	51	224	4.0	Tan
HS-B2-680 [‡]	680	309	2.00	51	340	6.1	Gray
HS-C2-125	125	57	2.50	64	50	0.9	Purple
HS-C2-170	170	77	2.40	61	70	1.3	Brown
HS-C2-210	210	96	2.30	58	90	1.7	Red
HS-C2-260	260	118	2.20	56	120	2.1	White
HS-C2-330	330	150	2.00	51	165	2.9	Black
HS-C2-460	460	209	2.00	51	230	4.1	Blue
HS-C2-610	610	277	2.00	51	305	5.4	Green
HS-C2-880 [‡]	880	400	2.00	51	440	7.8	Gray
HS-C2-1210 [‡]	1210	550	2.00	51	605	10.8	Silver
HS-C2-1540 [‡]	1540	700	2.00	51	770	13.7	Gray*
HS-C2-1870 [‡]	1870	850	2.00	51	935	16.7	Silver*
HS-2-C2-2420 [‡]	2420	1100	2.00	51	1210	21.6	Silver
HS-2-C2-3080 [‡]	3080	1400	2.00	51	1540	27.5	Gray*
HS-2-C2-3740 [‡]	3740	1700	2.00	51	1870	33.3	Silver*
HS-4-C2-3520 [‡]	3520	1600	2.00	51	1760	31.4	Gray
HS-4-C2-4840 [‡]	4840	2200	2.00	51	2420	43.1	Silver
HS-4-C2-6160 [‡]	6160	2800	2.00	51	3080	55.0	Gray*
HS-4-C2-7480 [‡]	7480	3400	2.00	51	3740	66.7	Silver*

*with Red inner spring

[‡]Published ratings allow minimum 25% additional travel to solid. For a full 50% specified minimum, use the ratings shown in the table below

TYPE HS DIMENSIONS

Size Range	D (in) (mm)		H (in) (mm)		W (in) (mm)		LRP (in) (mm)		MRD (in) (mm)
HS-B-20-150	4	102	7 1/4	184	4 3/4	121	5 1/8	130	3/4 19
HS-B-210-680	4	102	7 1/4	184	4 3/4	121	5 1/8	130	3/4 19
HS-C2-125-1870	4	102	8	203	5 1/4	133	5 1/4	133	7/8 22
HS-2-C2-2420-3740	9	229	10	254	5 1/4	133	6	152	1 25
HS-4-C2-3520-7480	7	178	13	330	8 7/8	225	8	203	1 1/4 32

Size	Derated Capacity (lbs) (kg)		Derated Deflection (in) (mm)		Size	Derated Capacity (lbs) (kg)		Derated Deflection (in) (mm)	
	(lbs)	(kg)	(in)	(mm)		(lbs)	(kg)	(in)	(mm)
B2-450	410	186	1.83	46.5	2-C2-2420	2020	918	1.67	42.4
B2-680	565	257	1.66	42.2	2-C2-3080	2570	1168	1.67	42.4
C2-880	800	364	1.82	46.2	2-C2-3740	3120	1418	1.67	42.4
C2-1210	1010	459	1.67	42.4	4-C2-3520	3600	1636	1.82	46.2
C2-1540	1285	584	1.67	42.4	4-C2-4840	4040	1836	1.67	42.4
C2-1870	1560	709	1.67	42.4	4-C2-6160	5145	2339	1.67	42.4
					4-C2-7480	6245	2839	1.67	42.4

PLAN VIEW OF HANGER LOCATIONS

TAG: _____
 UNIT: _____



SPECIFIED DEFLECTION

1:	6:
2:	7:
3:	8:
4:	9:
5:	10:
Sets Required:	