



MASON INDUSTRIES, Inc.

MERCER RUBBER Co.

350 Rabro Drive, Hauppauge, NY 11788  
 Mason- 631/348-0282 • Info@Mason-Ind.com  
 Mercer- 631/582-1524 • Info@Mercer-Rubber.com  
 FAX 631/348-0279





JOB NAME \_\_\_\_\_  
 CUSTOMER \_\_\_\_\_  
 CUSTOMER P.O. \_\_\_\_\_  
 MASON M. \_\_\_\_\_  
 DWG No. \_\_\_\_\_

**VFLSS-NSF**

60Vee SS BRAIDED  
 HOSE with  
 FLOATING  
 FLANGES

**ALL COMPONENTS STAINLESS STEEL**

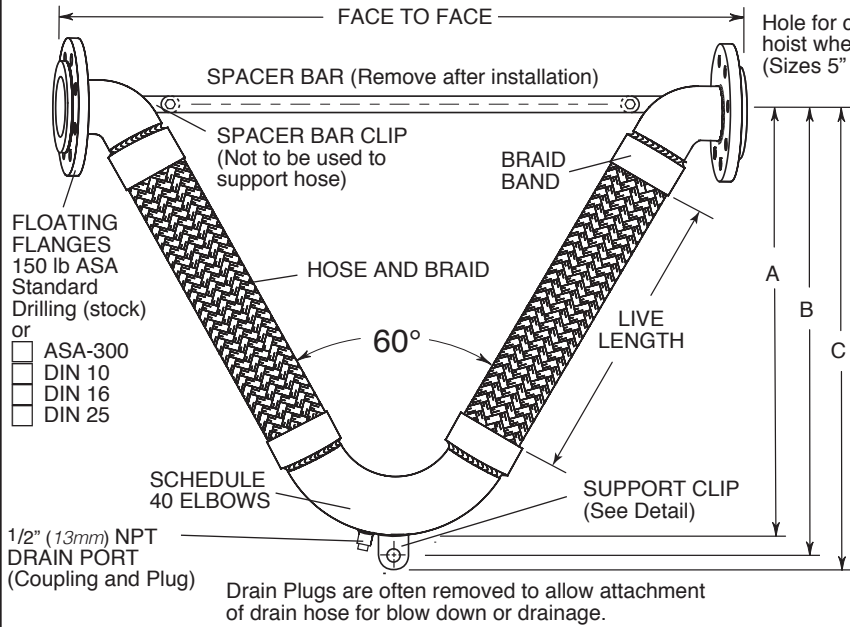

**CLASSIFIED**  
**UL**  
**US**  
**WATER QUALITY**  
 DRINKING WATER  
 SYSTEM COMPONENT  
 ANNEX G of ANSI / NSF 61  
 (4RV6)

These flexible joint fitting assemblies are UL Listed under File MH48651 and are intended for installation in accordance with the Mason installation instructions and the applicable requirements in Annex G of ANSI/NSF 61.


Mason Industries ensures for all UL Listed Products:

1. All hose dimensions meet our specifications and dimensions as tabulated.
2. Each assembly is pressure tested using Nitrogen Gas for 1 minute at 1 1/2 times the rated working pressure with no leaks.
3. Threads on the drain port are checked using a certified thread gauge to make certain that the threads were machined in accordance to ANSI/ASME B1.20.1.
4. A metal tag is attached which shows the UL Mark and Identification Number, our name, the location (US), and the Part Number with the approval date (month and year).
5. Two product stickers which show the UL Mark and Identification Number are on each shipping crate.

**SUPPORT CLIP**

Pipe Size (in)	Pipe Size (mm)	SUPPORT CLIP Hole Diameter (in)	SUPPORT CLIP Hole Diameter (mm)	Thickness (in)	Thickness (mm)
2	50	5/8	16	1/8	3
2 1/2	65	5/8	16	1/8	3
3	80	3/4	16	1/8	3
4	100	3/4	19	1/8	3
5	125	3/4	19	1/4	6
6	150	7/8	22	3/8	9
8	200	7/8	22	1/2	13
10	250	1	25	1/2	13
12	300	1	25	1/2	13

CLIP THICKNESS



**SUPPORT CLIP DETAIL**

When using VFLSS-NSF products in copper or brass water systems, dielectric flanges must be used on each end to prevent leakage from galvanic action.

**PLATE FLANGES**

Pipe Size (in)	Pipe Size (mm)	Flange Thickness (in)	Flange Thickness (mm)
2 thru 4	50 thru 100	5/8	16
5 thru 6	125 thru 150	3/4	19
8 thru 12	200 thru 300	1	25

Conforms to UL and ANSI/NSF 61 Approved Temperature Range.

Full Vacuum Rating— 30" (762mm) Hg

**RATED MOVEMENTS**

±4" (100mm) All Directional Seismic Movement  
 ±6" (150mm) Guided Thermal Movement Only

**VFLSS-NSF DIMENSIONS AND PRESSURE RATINGS (American Units)**

Pipe Size & Face to Face (in)	Live Length (in)	Corrugations per foot	A (in)	B (in)	C (in)	Rated Pressure @70°F (psi)
2 X 33	20	58	227/8	237/8	245/8	360
2 1/2 X 37	22	48	26	27	273/4	290
3 X 42	24	46	287/8	301/8	311/8	280
4 X 49	26	32	321/2	333/4	347/8	225
5 X 58	30	29	38	391/4	401/2	200
6 X 66	33	25	425/8	441/8	453/8	200
8 X 80	36	23	491/4	503/4	52	200
10 X 96	42	21	581/2	601/4	613/4	170
12 X 112	48	20	673/4	691/2	71	170

**VFLSS-NSF DIMENSIONS AND PRESSURE RATINGS (Metric Units)**

Pipe Size & Face to Face (mm)	Live Length (mm)	Corrugations per meter	A (mm)	B (mm)	C (mm)	Rated Pressure @21°C (kg/cm²)
50 X 838	508	190	603	613	629	25
65 X 940	559	157	660	689	711	20
80 X 1067	610	151	733	762	781	19
100 X 1245	660	105	826	857	886	16
125 X 1473	762	95	965	1010	1026	14
150 X 1676	838	82	1083	1118	1149	14
200 X 2032	914	75	1251	1289	1324	14
250 X 2438	1067	69	1486	1524	1559	12
300 X 2849	1219	66	1721	1762	1797	12

Face to Face Tolerance: minus 1% plus 3%. Minimum Burst is four times the Rated Pressure. Safety factor of 4. Size 12" (300mm) has double braid.

QTY	SIZE	TAG

QTY	SIZE	TAG