




MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com
 www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M.I. _____
 DWG. NO. _____

NS
 Closed Cell
 Neoprene
 Sponge

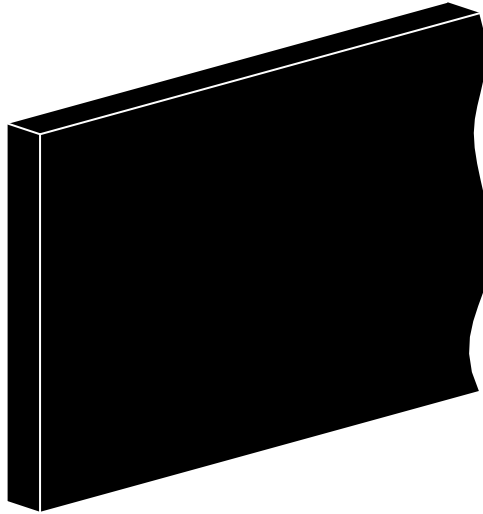

NEOPRENE SPONGE - Physical Property Technical Data

Property	Value SCE 41	Test Method (ASTM)
Compression deflection @ 25%, psi	5.0	D-1056
Compression set, 22 hrs. @ 1/2 hr. recovery	18.0	D-1056
Compression set 22 hrs. @ 158°F	50.5	
Set after 1/2 hr. recovery	21.5	
Set after 10 days recovery		
Low temperature brittleness	-62°F	D-736
Water absorption, 24 hrs. @ 70° F	1%	D-471
Density, grams/cc	<.40	-
Hardness shore 00	40-50	D-1056
Tensile, psi		
% Elongation	7-12	D-412
Ozone resistance, 240 hrs. @ 100 pphm @ 40 % elong.	0 0 7X	D-1149

CERTIFICATION DATA

SIZE	QTY.	TAG

NOTE: NS STANDARD LENGTH IS 48" (1200mm)