




MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com
 www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M.I. _____
 DWG. NO. _____

SFU

SINGLE SPHERE
 EPDM EXPANSION
 JOINT

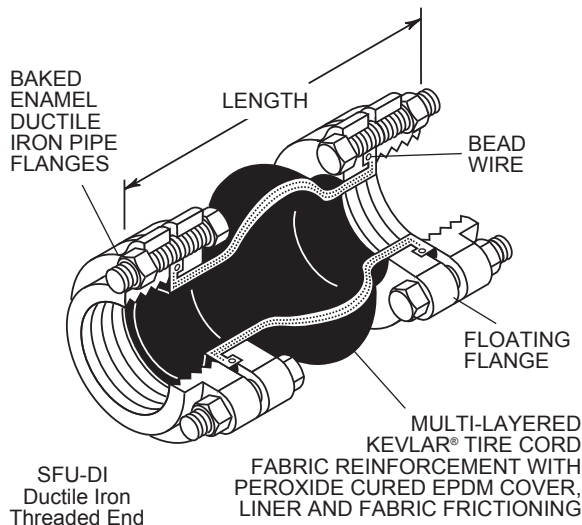

SFU-DI
 Ductile Iron
 Threaded End

If not all EPDM, Materials are:
 Cover Liner

- Neoprene
- Natural Rubber
- Hypalon
- Nitrile (Buna N)
- EPDM

SAFEX SFU DIMENSIONS AND ALLOWABLE MOVEMENTS


Pipe Size (in) (mm)	Length (in) (mm)	Allowable Movements			
		Compression (in) (mm)	Elongation (in) (mm)	Transverse ±(in) (mm)	Angular (degrees)
3/4	20	7	175		25°
1	25	7	175		24°
1 1/4	32	8	200	3/4 19	23°
1 1/2	40	8	200	3/8 10	22°
2	50	8	200	3/8 10	21°

SAFEX SFU Pressure Reduction at Higher Temperatures


Nominal Rating at:					Max. Vacuum (in Hg) (Minus Bar)
170°F 77°C	190°F 88°C	210°F 99°C	230°F 110°C	250°F 121°C	
250 psi 17 Bar	245 psi 16.5 Bar	235 psi 16 Bar	225 psi 15 Bar	215 psi 14 Bar	18" 0.6

Burst pressures are a minimum of three times Operating Pressures.


If not Ductile Iron, Ends are:



SFU-PT
 PVC
 Threaded
 End




SFU-CT
 Sweat End
 for Copper
 Tubing



SFU-PC
 PVC
 Cement
 End



SFU-SS
 Stainless
 Steel
 Threaded
 End



SFU-BT
 Brass
 Threaded
 End

CERTIFICATION DATA

SIZE	QTY.	TAG